

B E S T I N C L A S S

HOMEX
INNOVATIVE EXTERIORS™

THE ARLINGTON™ COLLECTION



Splendor. Substance. Surpassing Time.

A name passed down from old-world to world-class, Arlington™ holds the promise of elegance and performance. The Arlington™ Collection from HOMEX™ provides the ultimate in strength and durability for protection, and beauty that endures through time. Come home to the best; come home to Arlington™.

- Distinctively elegant; impressively textured
- Engineered to be exceptionally rigid and straight
- Superb durability and impact resistance
- Double-staggered nail hem and 3/4" bottom lap combine to withstand gale force winds
- Three color palettes offer 20 stylish color choices
- This HOMEX™ product is covered by a Limited Lifetime Warranty

THE ARLINGTON™ COLLECTION


BEST IN CLASS

Colors/Color Numbers

Classic Series™



Woodridge Series™ with Kynar® Film

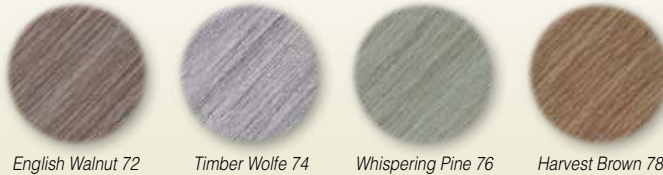

Regency Series™ with Solarkote®



*Premium colors made with Armor Coat UVA™ and Solarkote®PB.

Color representations shown may vary slightly from actual product color.

Profiles Available

Double 4, Double 6, and Dutch Lap 5

Product Test Data

HOMEX™ Vinyl Siding passes or exceeds all industry standards per ASTM D3679.

Siding Thickness	0.048" ± .001"
Specific Gravity	1.45
Tensile Strength (PSI)	7,154
Tensile Modulus (PSI)	416,900
IZOD Impact Strength @ 32° F	Passes per ASTM D3679
Heat Deflection Temp. @ 264 PSI	169° F
Coefficient of Linear Expansion	3.30 x 10 ⁻⁵
Warpage	0.00"
Heat Shrinkage	0.3%
Impact Resistant	Passes per ASTM D3679
Surface Distortion @ 140° F	0
Fire Rating	Class A
Flame Spread index	10
Smoke Developed	395
Fuel Contribution	0
Average Time of Burning	Self Extinguishing
Average Extent of Burning	2.379mm
Weathering	Passes per ASTM D3679
Windload Rating*	200+MPH

*(Wind velocity based on IBC).



Double-Staggered Tuff Hem™ Nail Hem

Arlington™ Siding provides twice the nailing surface of standard siding. Every sheet has two rows of reinforced slots in staggered configuration that greatly improves attachment strength.



Tuff-Lock™ Bottom Lap

Arlington™'s Tuff-Lock™ Bottom Lap measures 3/4" across – 20 percent larger than standard siding for the ultimate in locking integrity.



Style Crest, Inc.
2450 Enterprise St.
Fremont, Ohio 43420
800.846.9599
www.homexsiding.com

Solarkote® is a registered trademark of Arkema, Inc.
 Made in U.S.A. by America's dedicated workforce.
 Specifications subject to change without notice.



Consult the VSI website at www.vinylsiding.org for a current list of certified products and colors.